

Spectrum SCS-CBL-D1-XFT

Easy installation kit for D and F Series cameras


Features

- Available in 3ft & 6ft lengths.
Replace the 'X' in the part number for required length
- Class I II, Division 1, Zone 1



Description

This kit provides flexible installation to D and F Series cameras in Class I II, Division 1 and Zone 1 installations with RMC (Ridged Metal Conduit.) Available in cable lengths of 3FT or 6FT options with pre-assembled hazardous location barrier glands globally certified with rated conduit outlet box and adapters.

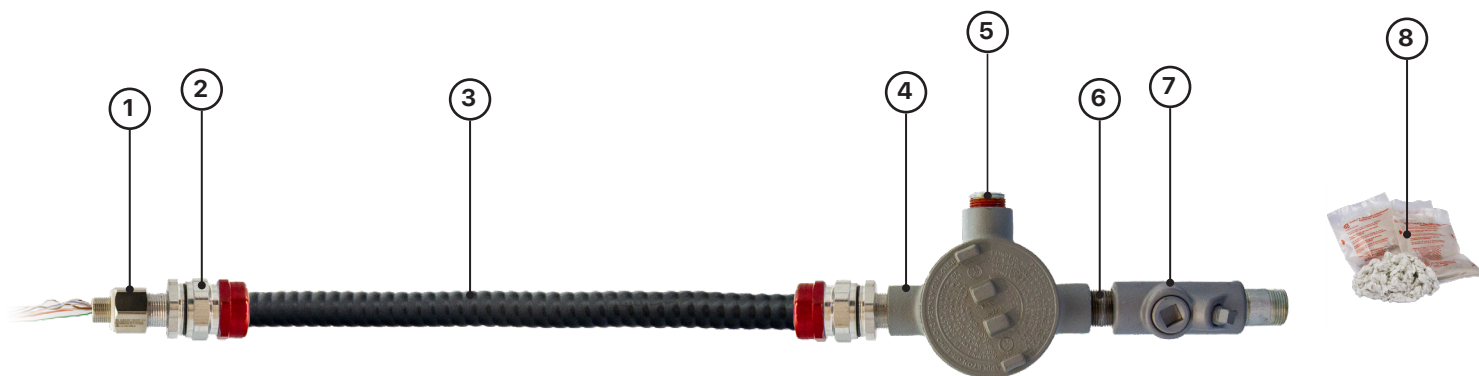

Cable Length		PART	
3 FOOT		SCS-CBL-D1-3FT	
6 FOOT		SCS-CBL-D1-6FT	
POS.	QTY	PART	Description
1	1	737DRM2T215	M20 MALE TO 3/4" NPT FEMALE. REQ. FOR D-SERIES
2	2	TMC2X-075A118X	TMC2X-075A118X 3/4" NPT GLAND
3	1	189W91277	ITC-HL CABLE-DEKORON
4	1	GRT75	APPLETON GRT75 CONDUIT OUTLET BOX, TYPE GRT, (3) 3/4" HUBS
5	1	1162T42	LOW-PRESSURE ZINC-PLATED STEEL FITTING PLUG WITH HEX DRIVE, 3/4"
6	1	4549K591	FULLY THREADED, 3/4 NPT, 1-3/8" LONG
7	1	193704	EYS216 APPLETON
8	1	ACK6F-A	CHICO APPLETON SEALING CEMENT